


ELECTROMECHANICAL VIBRATORS

TYPICAL MOUNTING CONFIGURATION

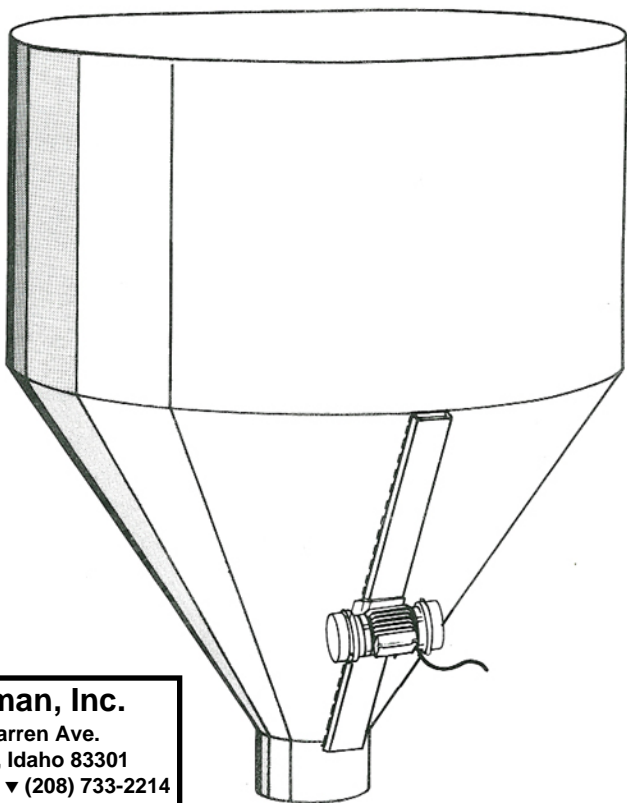

Huntsman, Inc.

2362 Warren Ave.

Twin Falls, Idaho 83301

(877) 733-2214 ▼ (208) 733-2214

Fax (208) 733-2240

www.huntsmaninc.com

mail@huntsmaninc.com

- A channel must be used for reinforcement when mounting an electromechanical vibrator.
- The reinforcement channel should extend the full length of the sloped section of the bin.
- A plate may be welded to the channel and drilled to the bolt hole specifications of the vibrator.
- The vibrator should be mounted $\frac{1}{4}$ to $\frac{1}{2}$ of the length of the sloped section as measured from the discharge.
- For bolt hole dimensions, see Bulletin 1000.201.
- For bolt and torque specifications, see Bulletin 4000.504.