

Westrup Equipment Tailored for Industrial Seed Cleaning

The New FAU-1500 Ultra Precision Air/Screen Cleaner

Westrup is proud to introduce the new FAU machine rated at 450 bph on wheat. The standard features are:

- Custom made steel channel frame with two counterbalanced shoes and a total of **five screen layers**, the four main layers are 59" wide by 94" long, the return layer is 59" wide by 63" long.
- 12.4" diameter steel feed roll with mechanically variable speed and adjustable feed gate with brush seal
- Air system with pre-aspiration, tall final air column with inspection window, three air settling chambers with inspection windows and right side discharge cull conveyors, calibrated air valve controls, false air valve and top mounted fan with 10 hp motor
- Eccentric drive with heavy duty bearings, 3 hp motor and mechanically variable speed




Westrup FAU-1500: With five screen layers and a highly efficient air system, is the perfect machine for your precision air/screen cleaning operations. The machine can effectively clean a wide range of crops to meet seed and food grade standards.

Your new machine will be backed by the world's leading manufacturer of seed conditioning equipment. Over the past 40 years we have installed our machines in more than 100 countries. Our machines are known for their **flexibility, accuracy and reliability**.

Flexible Screen System

The machine offers several flow options. The operator can scalp, sift or size on any of the first four screen layers and can easily change from one flow pattern to another by moving the discharge chutes. The material can be split into two parallel flows for high capacity.

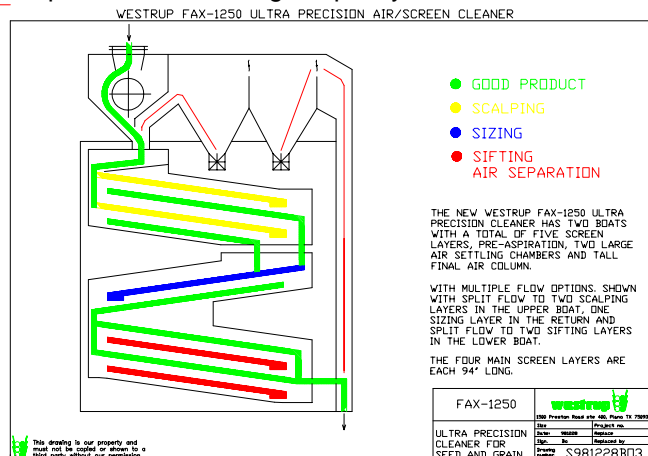

Multiple flow options: Shown with split flow to two scalping layers in the upper shoe, one sizing layer in the return and split flow to two sifting layers in the lower shoe.

Westrup Optional Features

The FAU can be equipped with the following options:

- Vibratory feeder with adjustable vibration control
- Quick change screen access doors
- Steel lined screen tracks with rubber seal
- Inverter drives for eccentric and feed roll
- External bearings on the cull auger discharges
- Brush cleaning instead of ball screen cleaning
- Electronic air valve controls
- Adjustable depth final air column
- Adjustable stroke length eccentric bearings
- Larger fan with 15 hp heavy duty motor

HAND IT OVER TO WESTRUP, YOUR WORLDWIDE INNOVATOR IN SEED CONDITIONING.

Huntsman, Inc.

2362 Warren Ave.
Twin Falls, ID 83301
(888) 812-3377 Fax: (208) 733-2214